

SERIES **LLA**
ALUMINUM LINEAR BAR



60 Watt

SERIES LLA

ALUMINUM LINEAR BAR


TECHNICAL DATA SHEET

	LLA60
Typical rated power (W)	60
Lamp luminous flux (lm)	9.600
Luminous efficiency (lm/W)	160
Weight (Kg)	3,10
Dimensions LxPxH (mm)	1525 x 85 x 78
Lamp body colour	Aluminum - Gray
Correlated colour temperature (K)	5.000 K
Colour rendering index	CRI >80
Useful life L80B20 ⁽ⁱ⁾	> 50.000 hours
Input voltage (V)	200/240 V - 50/60 Hz
Operating temperature (°C)	- 20° C ÷ + 40° C
Photobiological hazard	Group 0 (exempted from CEI EN62471:2010 provisions)
International Protection	IP65
Energy class	A+

(i) L is the percentage of light output remaining after lumen-maintenance life measured in hours. B represents the max. percentage of LED with failure within lumen-maintenance life period.

Characteristics subject to changes without prior notice. Rev. 04/2019

0789011285391 LPC060AL Aluminum linear LED ceiling light 60W IP65 5000K Mod. LLA50

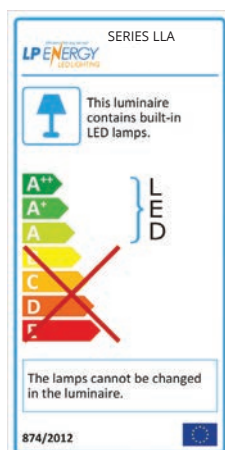

DIMENSIONS

